

G-26c/GCG-26c

UPRIGHT COOLER

G-Series Coolers

FEATURES

- Exterior Dimensions (WDH): 30" x 30.5" x 78.375"
- Internal Volume: 23 ft³
- Dynamic LED Lighting In Door Provides Enhanced Product Illumination While Greatly Reducing Energy Consumption
- Forced Air Refrigeration System For Fast Product Temperature Pull Down
- High Impact Side Panel Graphics & LED Illuminated Canopy
- High Density Environmentally Friendly Insulation
- Utilizes Climate-Friendly Natural Refrigerant
- 4 Fully Adjustable Powder-Coated Metal Shelves
- Double-Paned, Low "E", Self-Closing Glass Door
- LED Interior Lighting
- Durable Pre-Painted Steel Cabinet and Heavy Duty Inner Liner
- Adjustable Temperature Control
- 9' Heavy Duty Power Cord

CERTIFICATIONS

110_v

- UL471
- NSF/ANSI-7: Type 2 Display Refrigerator
- ENERGY STAR® Qualified









TECH SPECS

Refrigerant R290
Amps 2.7
Volts/Hz 110-120V/60Hz
Compressor HP 1/3

SHIPPING SPECS

40'HQ ~ 45 53' ~ 60

G-26c/GCG-26c

UPRIGHT COOLER

G-Series Coolers



DIMENSIONS

Shipping Options:

Exterior: 30"W x 30.5"D x 78.375"H Interior: 26.5"W x 25.125"D x 51.5"H


Shelf: 25.5"W x 22.625"D Internal Volume: 23 ft³

PACKOUT CAPACITIES

		Facings		Deep	Total Capacity	Total Rows
72os Can	7 Shelves	10	Х	8	= 650*	8
	Base	10	х	9		
léaz Can	6 Shelves	10	Х	8	= 570*	7
	Base	10	Х	9		
20 oz PET	4 Shelves	9	х	8	= 360**	5
	Base	9	х	8		

^{*}Additional shelves, beyond what is supplied with the cooler, may be required to achieve this maximum pack-out.
** 20oz pack-outs may vary depending on package size.

EXTERIOR DIMENSIONS

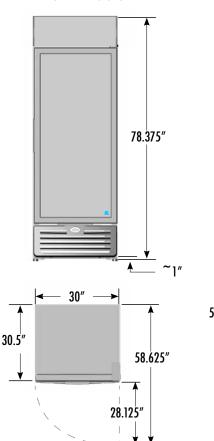

INTERIOR DIMENSIONS

